


Input Specifications	
Inputs	8 (sink/source)
Rated Voltage	12–24 VDC
Operating Voltage Range	10.2–26.4 VDC
Input Current	7.6 mA @ 24VDC
Maximum Input Current	8.8 mA @ 27.6 VDC
Maximum ON Current	2.5 mA
Maximum OFF Current	0.5 mA
ON Voltage Level	> 7.6 VDC
OFF Voltage Level	< 6.4 VDC
OFF to ON Response	2ms max
ON to OFF Response	2ms max
Status Indicators	Logic Side (8 points)
Commons	1

Output Specifications	
Outputs	7 (sinking)
Rated Voltage	3.3–24 VDC
Operating Voltage Range	2.8–30 VDC
Maximum Output Current	1A continuous 4A temporary overload, 50ms 6A temporary overload, 10ms
On Voltage Drop	0.18 VDC
OFF to ON, ON to OFF Response	0.5 ms
Status Indicators	Logic Side (7 points)
Commons	1
Maximum Applicable Fuse	8A
External Power Supply Required	12–24 VDC (–15% / +20%) @ 25mA

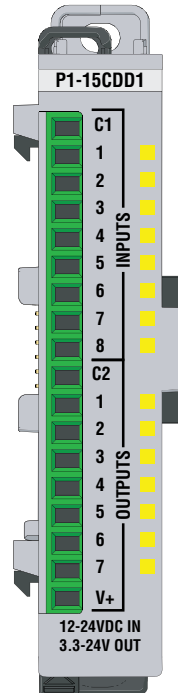

P1-15CDD1 Input / Output

The P1-15CDD1 Input/Output Module provides eight 12–24 VDC inputs plus seven outputs that sink up to 1A per output for loads connected to 3.3–24 V supplies for use with the Productivity1000 system.


Input Specifications	1
Output Specifications	1
Module Installation	2
QR Code	2
Wiring Options	3
Schematic & Wiring Diagram	3
General Specifications	4
Terminal Block Specifications	4
Warning	4

Terminal Block sold separately, (see wiring options on page 3).
 Warranty: Thirty-day money-back guarantee. Two-year limited replacement (See www.productivity1000.com for details).

Module Installation


WARNING: Do not add or remove modules with field power applied.

Step One: With latch in "locked" position, align connectors on the side of each module and stack by pressing together. Click indicates lock is engaged.

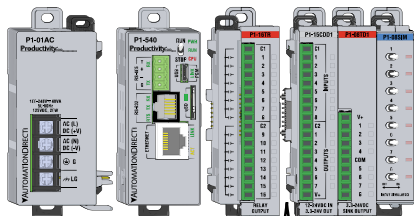


Step Two: Attach field wiring using the removable terminal block or ZIPLink wiring system.


Check all latches are secure after modules are connected.

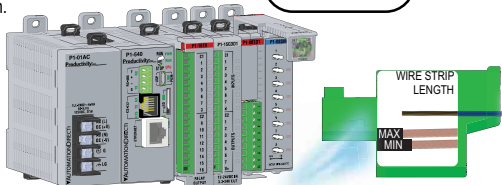

Step Three: To unstack modules, pull locking latch up into the unlocked position and then pull modules apart.

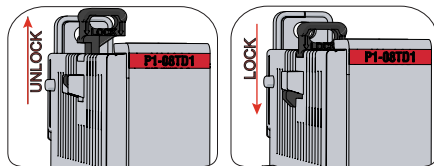

QR Code

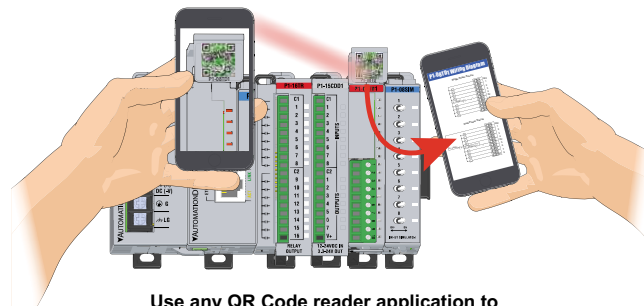

Use any QR Code reader application to display the module's product insert.

P1-15CDD1 Schematic and Wiring Diagram

Wiring Options

1 ZIPLink Connection System Cable + ZIPLink Module = Complete System

ZIPLink pre-wired
terminal block
cables



ZL-P1-CBL18

0.5 m (1.6 ft)
cable

1.0 m (3.3 ft)
cable

2.0 m (6.6 ft)
cable

ZL-P1-CBL18-1

ZL-P1-CBL18-2

ZIPLink Modules
Feed through

ZL-RTB20

ZL-RTB20-1

2 Terminal Block with pigtail cable



ZL-P1-CBL18-1P

1.0 m (3.3 ft)
cable

2.0 m (6.6 ft)
cable


ZL-P1-CBL18-2P

3 Screw Terminal Block only




P2-RTB
(Quantity 1)

4 Spring Clamp Terminal Block only





P2-RTB-1
(Quantity 1)

Typical Input Circuit



Typical Output Circuit

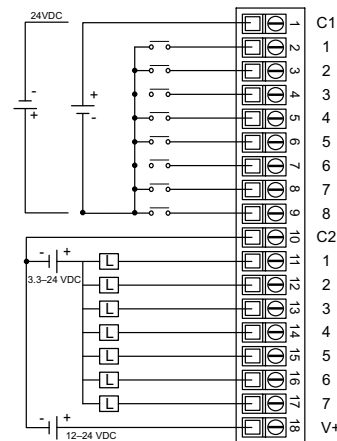

WARNING: To minimize the risk of potential safety problems, you should follow all applicable local and national codes that regulate the installation and operation of your equipment. These codes vary from area to area and it is your responsibility to determine which codes should be followed, and to verify that the equipment, installation, and operation are in compliance with the latest revision of these codes.

Equipment damage or serious injury to personnel can result from the failure to follow all applicable codes and standards. We do not guarantee the products described in this publication are suitable for your particular application, nor do we assume any responsibility for your product design, installation, or operation.

If you have any questions concerning the installation or operation of this equipment, or if you need additional information, please call Technical Support at 770-844-4200.

This publication is based on information that was available at the time it was printed. At AutomationDirect.com® we constantly strive to improve our products and services, so we reserve the right to make changes to the products and/or publications at any time without notice and without any obligation. This publication may also discuss features that may not be available in certain revisions of the product.

Terminal Block Specifications

Part Number	P2-RTB	P2-RTB-1
Positions	18 Screw Terminals	18 Spring Clamp Terminals
Wire Range	30–16 AWG (0.051–1.31 mm²) Solid / Stranded Conductor 3/64 in (1.2 mm) Insulation Max. 1/4 in (6–7 mm) Strip Length	28–16 AWG (0.081–1.31 mm²) Solid / Stranded Conductor 3/64 in (1.2 mm) Insulation Max. 19/64 in (7–8 mm) Strip Length
Conductors	*USE COPPER CONDUCTORS, 75°C* or equivalent.	
Screw Driver	0.1 in (2.5 mm) Maximum*	
Screw Size	M2	N/A
Screw Torque	2.5 lb-in (0.28 N-m)	N/A

*Recommended Screw Driver TW-SD-MSL-1

General Specifications

Operating Temperature	0° to 60°C (32° to 140°F)
Storage Temperature	-20° to 70°C (-4° to 158°F)
Humidity	5 to 95% (non-condensing)
Environmental Air	No corrosive gases permitted
Vibration	IEC60068-2-6 (Test Fc)
Shock	IEC60068-2-27 (Test Ea)
Field to Logic Side Isolation	1800VAC applied for 1 second
Insulation Resistance	>10MΩ @ 500 VDC
Heat Dissipation	1800mW
Enclosure Type	Open Equipment
Module Location	Any I/O position in a Productivity1000 System.
Field Wiring	Use ZIP Link Wiring System or removable terminal block (sold separately). See "Wiring Options" on page 3.
EU Directive	See the "EU Directive" topic in the Productivity Suite Help File. Information can also be obtained at: www.productivity1000.com
Connector Type (sold separately)	18 Position Removable Terminal Block
Weight	71g (2.5 oz)
Agency Approvals	UL 61010-2-201 file E139594, Canada & USA CE (EN61131-2 EMC and EN61010-2-201 Safety)*

*See CE Declaration of Conformance for details.

Document Name	Edition/Revision	Date
P1-15CDD1-DS	1st Edition	9/5/2017

Copyright 2017, AutomationDirect.com Incorporated/All Rights Reserved Worldwide